




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		vacuum	length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
1467751	102	4	126	4,96	20	300	80	1200	6,52	4,38	510	20,1	0,9	120	400
1467840	127	5	155	6,11	20	300	80	1200	8,59	5,77	635	25,0	0,9	60	200

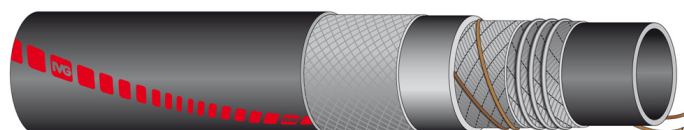

EN

## Suction and discharge of abrasive materials

**Standards:** PDA ABS Nr. 23-2375199-PDA.

**Application:** hardwall hose designed to convey barite and bentonite and other abrasive materials from ship to oil rigs to consolidate the oil well.

Tensile breaking load: 7000 kgf.

**Temperature:** from -25°C (-13°F) to +70°C (+158°F).

**Construction**

**Tube:** black, smooth, abrasion resistant NR/SBR rubber.

**Reinforcement:** high strength synthetic cord, steel helix wire, and antistatic copper wire.

**Cover:** black, smooth (wrapped finish), weathering, ozone, and sea-water resistant.

**Branding:** continuous red stripe "IVG Offshore (family logo) - PL ABRASIVE SD 20 - PDA Nr. 23-2375199-PDA". Embossed marking "IVG Offshore - M/Y - PL ABRASIVE SD 20 - I.D. - W.P. - TEMP."

CN

## 石油平台磨料吸排管

**质量标准:** 抽吸和输送磨料标准符合PDA ABS Nr. 23-2375199-PDA。

**应用范围:** 硬壁软管，设计用于将重晶石和膨润土及其他磨料从船运送到石油钻机，以巩固油井。

抗拉强度: 7000kgf。

**温度范围:** 从-25° C到 +70° C。

**软管结构**

内层: 黑色, 光滑, 耐磨的 NR/SBR 橡胶。

加强层: 高强度合成线及螺旋钢丝加强, 带防静电铜线。

外层: 黑色, 光滑 (表面布纹), 耐气候, 耐臭氧和海水。

商标: 连续红色条纹带 "IVG Offshore (公司商标) - PL ABRASIVE SD 20 - PDA Nr. 23-2375199-PDA"。连续凸起标记 "IVG Offshore- 月 / 年 - PL ABRASIVE SD 20 - 内径. - 工作压力 - 温度。"