


Etna



Marine wet exhaust gas hose

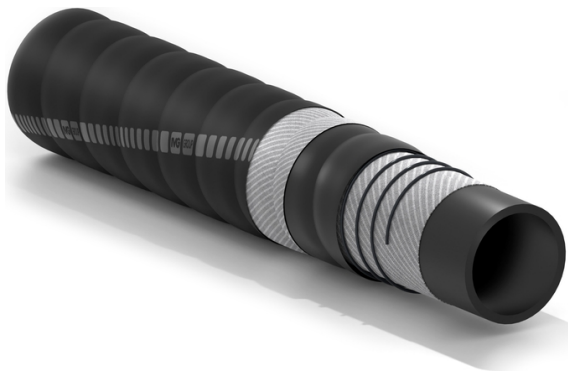

Application:

hardwall corrugated hose, flexible and lightweight, used to convey wet gas exhaust mixed with sea water in pleasure boats.

Approved by VTT and Lloyd's
 Wide range of diameters
 Excellent bending radius

Specifications:

Lloyd's Register Rules and Regulations for the Classification of Special Service Craft. VTT approved Nordic Boat Standard MC9.



Tube:

black, smooth, synthetic rubber, gas exhaust resistant

Reinforcement:

high strength synthetic cord plus steel helix wire.

Cover:

black, corrugated (wrapped finish), flame retardant synthetic rubber, weathering resistant.

Temperature:

from -30°C (-22°F) to +100°C (+212°F).

Branding:

continuous white/blue stripe "Boat (family logo) ETNA - MARINE WET GAS EXHAUST - LLOYD'S N° LR24147261TA - FIRE RESISTANT - ACCORDING MK9 VTT REP 761/97 (IVG LOGO)".



Etna



| Code | Inside diameter | | Burst pressure | | Weight nominal | | Bending radius | | Length max | |
|---------|-----------------|---------|----------------|-----|----------------|--------|----------------|------|------------|-----|
| | mm | inch | bar | psi | kg/m | lbs/ft | mm | inch | m | ft |
| 1386530 | 25 | 1 | 2 | 30 | 0,53 | 0,35 | 100 | 3,9 | 60 | 200 |
| 1391526 | 32 | 1-1/4 | 2 | 30 | 0,65 | 0,43 | 130 | 5,1 | 60 | 200 |
| 1390902 | 38 | 1-1/2 | 2 | 30 | 0,74 | 0,50 | 150 | 5,9 | 60 | 200 |
| 1383620 | 40 | 1-37/64 | 2 | 30 | 0,77 | 0,52 | 160 | 6,3 | 60 | 200 |
| 1383639 | 45 | 1-49/64 | 2 | 30 | 0,86 | 0,57 | 170 | 6,7 | 60 | 200 |
| 1378392 | 51 | 2 | 2 | 30 | 1,06 | 0,71 | 180 | 7,1 | 60 | 200 |
| 1383612 | 58 | 2-9/32 | 2 | 30 | 1,2 | 0,80 | 190 | 7,5 | 60 | 200 |
| 1383590 | 63,5 | 2-1/2 | 2 | 30 | 1,3 | 0,87 | 200 | 7,9 | 60 | 200 |
| 1383604 | 76 | 3 | 2 | 30 | 1,46 | 0,98 | 250 | 9,9 | 60 | 200 |
| 1384856 | 90 | 3-35/64 | 2 | 30 | 1,71 | 1,15 | 330 | 13,0 | 60 | 200 |
| 1384864 | 102 | 4 | 2 | 30 | 2,05 | 1,38 | 410 | 16,2 | 60 | 200 |
| 1385429 | 127 | 5 | 2 | 30 | 2,58 | 1,73 | 560 | 22,1 | 60 | 200 |
| 1393952 | 152 | 6 | 2 | 30 | 3,18 | 2,14 | 680 | 26,8 | 60 | 200 |
| 1396757 | 203 | 8 | 2 | 30 | 5,5 | 3,69 | 995 | 39,2 | 60 | 200 |

SPECIAL DETAILS

WARNINGS AND PRECAUTIONS

Rubber hoses have a service life proportional to their usage.

The equipment and systems where the hose is installed must be designed to ensure safe operation. Given the wide range of possible applications, IVG Colbachini does not guarantee suitability for all specific uses. The selection of the most appropriate product for the intended application, ensuring the required performance and safety standards, is the sole responsibility of the user.

IVG Colbachini shall therefore not be held liable for any use other than those indicated in its catalogues, product data sheets, quotations, order confirmations, or any accompanying recommendations.

Improper product selection and/or use, or failure to comply with installation, operation, maintenance, and storage procedures, may result in hose failure and cause damage to property or personal injury.

IVG Colbachini manufactures and markets both assembled hoses and hoses supplied without fittings.

Assembled Hoses

Before being placed on the market, the hose assembly is subjected by IVG to manufacturing control tests carried out by qualified personnel.

IVG declines all responsibility for any subsequent modifications, disassembly, or reinstallation of fittings performed by the user, as well as for uses that differ from those indicated in the product data sheet or in the absence of maintenance programs and periodic inspections.

Hoses and Fittings as spare parts

The user is responsible for assembling the hose and fittings, ensuring proper hose/fitting compatibility and compliance with the technical specifications for use. It is recommended that the hose assembly be subjected to a pressure tightness test carried out by qualified personnel.

IVG declines all responsibility in this regard.

Precautions

For proper selection and correct use of IVG products, reference should also be made to the recommendations issued by Assogomma, available at www.ivgspa.it, in accordance with ISO 8331 regarding installation, maintenance, methods and duration of use, as well as fitting stability and tightness.

For safety reasons, the working pressure indicated in the product technical data sheet must never be exceeded.

In general, continuous operation at maximum allowable pressure and/or temperature may significantly reduce the hose service life. Regular inspections and hydrostatic testing at the specified test pressure must therefore be carried out. Hydrostatic tests must be performed by adequately trained personnel using suitable equipment and in accordance with recognized testing standards.

For specific applications of rubber hoses, reference should be made to applicable legal requirements or compliance standards. Additional recommendations are available for particularly critical applications. For further information, please contact info@ivgspa.it.