


Everest EPR

Suction and discharge of aggressive chemicals, EPR quality

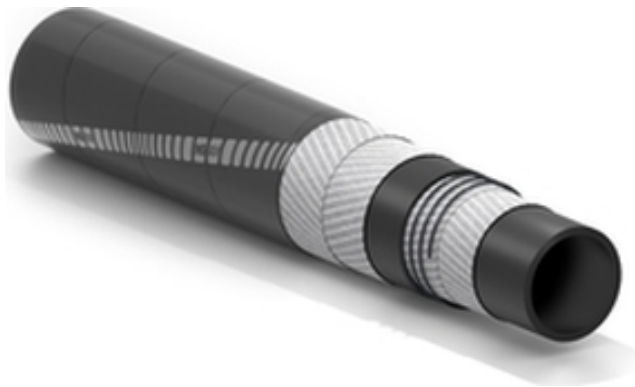

Application:

hardwall hose designed to handle a wide range of chemical products, acids, bases, aldehydes and ketones. It is specially recommended to convey industrial waters and for use in water purification systems.

Suction and delivery of chemical products
Electrically conductive
Highly chemical resistant EPR

Tube:

black, smooth, antistatic EPR rubber. Chemical resistance according to IVG chemical resistance chart. For temperature exceeding 50°C contact IVG.

Reinforcement:

high strength synthetic cord plus steel helix wire.

Cover:

black, antistatic, smooth (wrapped finish), EPR rubber, resistant to chemical products, abrasion, weathering and ozone.

Temperature:

-40°C (-40°F) +120°C (+248°F) depending on medium.

Branding:

continuous violet stripe "IVG Chem (family logo)..."

Everest EPR



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Bending radius		Vacuum	Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
1262270	13	1/2	27,5	1,06	10	150	40	600	0,6	0,39	60	2,4	0,9	120	400
1210947	19	3/4	32	1,26	10	150	40	600	0,7	0,45	85	3,3	0,9	120	400
1067591	25	1	38	1,50	10	150	40	600	0,87	0,59	115	4,5	0,9	120	400
1025325	32	1-1/4	46,5	1,83	10	150	40	600	1,16	0,78	145	5,7	0,9	120	400
1094939	38	1-1/2	51	2,01	10	150	40	600	1,23	0,83	180	7,1	0,9	120	400
1348892	51	2	65	2,56	10	150	40	600	1,77	1,19	245	9,7	0,9	120	400
1348906	76	3	92	3,62	10	150	40	600	2,99	2,01	390	15,4	0,9	120	400
1211064	102	4	120	4,73	10	150	40	600	4,65	3,12	555	21,9	0,9	120	400

Variants available on request:

1. Different diameters
2. Different colour covers
3. Different working pressures.

Recommended Couplings:



Camlock



Thread coupling EN 14420-5 (DIN 2817)



TW EN 14420-6

SPECIAL DETAILS

SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, **IVG Colbachini** cannot guarantee the proper functioning of the product for all situations.

The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills. IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it. These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover, additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).