


Australia EN 1360

Fuel and oil delivery hose

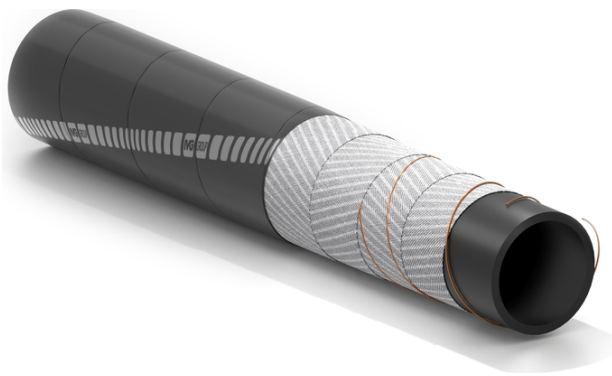

Specifications:
EN 1360:2013 type 1, M grade.

Application:
softwall hose used for the delivery of petroleum products such as diesel, gasoline with aromatic content up to 50%. Also used in support of refueling pumps.

Aromatic content up to 50%
Length up to 120 m
Also for refueling pumps



Tube:
black, smooth synthetic rubber.

Reinforcement:
high strength synthetic cord plus antistatic copper wires.

Cover:
black, smooth (wrapped finish), synthetic rubber, weathering and oil resistant.

Temperature:
from -30°C (-22°F) to +55°C (+131°F).

Electrical resistance:
 $R < 1 \times 10^2 \Omega$ /application lengths, ensured by connecting the copper wires to the couplings.

Branding:
continuous yellow stripe "IVG (family logo)...".



Australia EN 1360



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1464370	16	5/8	28	1,10	16	240	48	720	0,54	0,37	120	400
1464361	19	3/4	31	1,22	16	240	48	720	0,62	0,42	120	400
1453114	25	1	37	1,46	16	240	48	720	0,76	0,52	120	400

Variants available on request:

1. Different diameters.
2. Australia Reel hose.

Recommended Couplings:



Camlock EN 14420-7 (DIN 2828)



Thread coupling EN 14420-5 (DIN 2817)



Safety clamps EN 14420-3 (DIN 2817)

