


# Navysil LO

High temperature air, water and wet exhaust suction and delivery hose

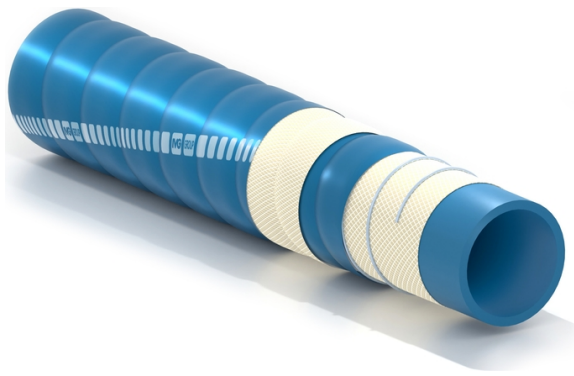

**Specifications:**  
SAE J 2006.

**Application:**

hardwall, corrugated silicone hose used for the suction and delivery of fluids such as water mixed with anti-freeze liquids and hot air, with good resistance to mineral oils. Suitable to be used as a flexible connection in nautical engine cooling systems where a high temperature resistance is required.

Silicon solution  
Suitable for high temperatures  
Excellent bending radius



**Tube:**  
blue, smooth, silicone.

**Reinforcement:**  
synthetic cord plus steel helix wire.

**Cover:**  
blue, corrugated, silicone.

**Temperature:**  
from -50°C to +180°C, peaks up to +200°C.

**Branding:**  
continuous red stripe "Boat (family logo) NAVYSIL LO - SAE J 2006 - W.P. 3 bar 45 psi S.F. 3:1 (IVG LOGO)".



# Navysil LO



Code	Inside diameter		Working pressure		Burst pressure		Weight nominal		Bending radius		Vacuum	Length max	
	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch		bar	m
1600705	19	3/4	3	45	9	135	0,5	0,34	70	2,8	0,9	60	200
1600706	25	1	3	45	9	135	0,67	0,44	90	3,5	0,9	60	200
1600707	32	1-1/4	3	45	9	135	0,81	0,54	110	4,3	0,9	60	200
1600708	38	1-1/2	3	45	9	135	1,02	0,69	130	5,1	0,9	60	200
1600213	51	2	3	45	9	135	1,31	0,88	200	7,9	0,9	60	200
1600709	63,5	2-1/2	3	45	9	135	1,59	1,07	300	11,8	0,9	60	200
1700042	76	3	3	45	9	135	1,99	1,34	350	13,8	0,9	60	200
1700583	90	3-35/64	3	45	9	135	2,33	1,56	450	17,7	0,9	60	200
1700584	102	4	3	45	9	135	2,61	1,75	500	19,7	0,9	12	40
1700586	127	5	1	15	3	45	4,01	2,70	640	25,2	0,9	12	40
1700587	152	6	1	15	3	45	4,74	3,19	800	31,5	0,9	12	40
1700589	203	8	1	15	3	45	7,58	5,09	1100	43,3	0,9	12	40

## Variants available on request:

1. Different diameters.
2. Different colors.
3. Hardwall hose with smooth cover.

## SPECIAL DETAILS

### WARNINGS AND PRECAUTIONS

Rubber hoses have a service life proportional to their usage.

The equipment and systems where the hose is installed must be designed to ensure safe operation. Given the wide range of possible applications, IVG Colbachini does not guarantee suitability for all specific uses. The selection of the most appropriate product for the intended application, ensuring the required performance and safety standards, is the sole responsibility of the user.

IVG Colbachini shall therefore not be held liable for any use other than those indicated in its catalogues, product data sheets, quotations, order confirmations, or any accompanying recommendations.

Improper product selection and/or use, or failure to comply with installation, operation, maintenance, and storage procedures, may result in hose failure and cause damage to property or personal injury.

---

IVG Colbachini manufactures and markets both assembled hoses and hoses supplied without fittings.

#### Assembled Hoses

Before being placed on the market, the hose assembly is subjected by IVG to manufacturing control tests carried out by qualified personnel.

IVG declines all responsibility for any subsequent modifications, disassembly, or reinstallation of fittings performed by the user, as well as for uses that differ from those indicated in the product data sheet or in the absence of maintenance programs and periodic inspections.

#### Hoses and Fittings as spare parts

The user is responsible for assembling the hose and fittings, ensuring proper hose/fitting compatibility and compliance with the technical specifications for use. It is recommended that the hose assembly be subjected to a pressure tightness test carried out by qualified personnel.

IVG declines all responsibility in this regard.

#### Precautions

For proper selection and correct use of IVG products, reference should also be made to the recommendations issued by Assogomma, available at [www.ivgspa.it](http://www.ivgspa.it), in accordance with ISO 8331 regarding installation, maintenance, methods and duration of use, as well as fitting stability and tightness.

**For safety reasons, the working pressure indicated in the product technical data sheet must never be exceeded.**

**In general, continuous operation at maximum allowable pressure and/or temperature may significantly reduce the hose service life. Regular inspections and hydrostatic testing at the specified test pressure must therefore be carried out. Hydrostatic tests must be performed by adequately trained personnel using suitable equipment and in accordance with recognized testing standards.**

For specific applications of rubber hoses, reference should be made to applicable legal requirements or compliance standards. Additional recommendations are available for particularly critical applications. For further information, please contact [info@ivgspa.it](mailto:info@ivgspa.it).