


Easyclean

Extruded hot water washing hose

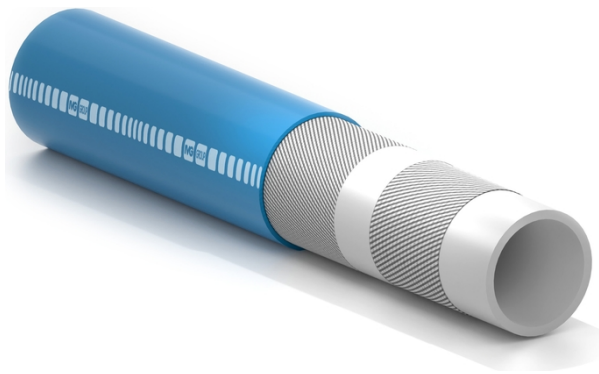

Specifications:

Tube: phthalates free. Cover: according to ISO 22196:2011 (Ref.1). Tube rubber is made with materials according to FDA tit. 21 art. 177.2600 and BfR XXI Cat. 3.

Tube:

white, seamless synthetic rubber, fat resistant.

Reinforcement:

high, strength synthetic fabrics.

Cover:

antimicrobial, blue, seamless synthetic rubber, aeing, ozone and fat resistant.

Application:

hot water washing hose in food environment with excellent resistance to high temperatures. Suitable for hygienic operations in dairies, canneries, slaughterhouses and all food processing industries. Particularly fat resistant cover. Not suitable for conveying food.

Extruded hose

Antimicrobial cover, fat resistant
 Compliant with food regulations



Temperature:

from -20°C (-4°F) to +95°C (203°F).

Branding:

IVG EASYCLEAN - WASHDOWN IN FOOD INDUSTRIES - W.P. 10 BAR - SIZE - 95°C - BATCH NUMBER.



Easyclean



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Bending radius		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1466267	13	1/2	21,4	0,84	10	150	30	450	0,34	0,23	80	3,2	60	200
1466275	16	5/8	25	0,99	10	150	30	450	0,43	0,29	95	3,7	60	200
1466283	19	3/4	28,4	1,12	10	150	30	450	0,52	0,35	115	4,5	50	164
1466291	25	1	35	1,38	10	150	30	450	0,7	0,47	155	6,1	40	131

