


Tasmania

Fuel and oil delivery hose

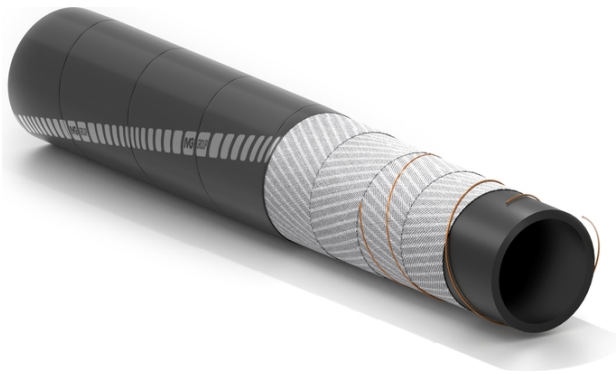

Application:

softwall hose used for the delivery of petroleum products with aromatic content up to 50%.

Wide temperature range
Aromatic content up to 50%
Length up to 120 m

Tube:

black, smooth, NBR dissipative rubber.

Reinforcement:

high strength synthetic cord and antistatic copper wire.

Cover:

black, smooth (wrapped finish), NBR rubber, weathering and oil resistant.

Temperature:

from -35°C (-31°F) to +80°C (+176°F).

Branding:

continuous yellow stripe "IVG Oil (family logo)...".



Tasmania



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1491601	19	3/4	29	1,14	10	150	30	450	0,47	0,32	120	400
1490540	25	1	35	1,38	10	150	30	450	0,58	0,39	120	400
1494040	32	1-1/4	42	1,65	10	150	30	450	0,72	0,48	120	400
1491598	38	1-1/2	48,5	1,91	10	150	30	450	0,91	0,61	120	400
1490559	51	2	61,5	2,42	10	150	30	450	1,18	0,79	120	400
1495054	63,5	2-1/2	75	2,95	10	150	30	450	1,63	1,10	120	400
1494058	76	3	91	3,58	10	150	30	450	2,41	1,62	120	400
1495062	90	3-35/64	105	4,13	10	150	30	450	2,82	1,89	120	400
1490567	102	4	117	4,61	10	150	30	450	3,18	2,14	120	400

Variants available on request:

1. Hardwall Tampa hose with smooth cover.
2. Different diameters.
3. Different working pressures.

Recommended Couplings:



TW EN 14420-6



Fuel Italian Type coupling



Camlock EN 14420-7 (DIN 2828)

