


Cable

Cable covering hose

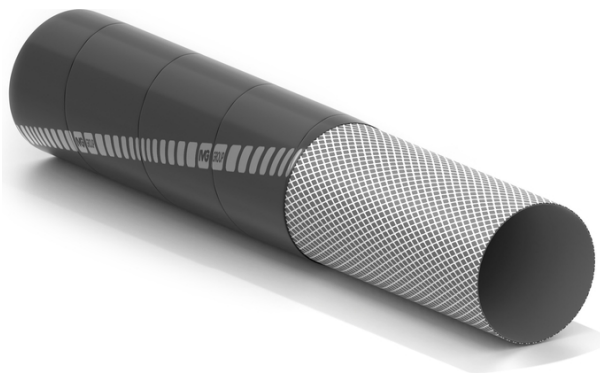

Application:
softwall cable covering hose used in any industrial application and for welding machines.

Lightweight hose
For welding machines
Industrial applications

Reinforcement:
high strength rubberized synthetic cord.

Cover:
black, smooth (wrapped finish), SBR rubber.

Temperature:
from -30°C (-22°F) to +80°C (+176°F).



Cable



Code	Inside diameter		Outside diameter		Weight nominal		Length max	
	mm	inch	mm	inch	kg/m	lbs/ft	m	ft
1187821	20	25/32	22	0,87	0,08	0,06	40	131
1112635	22	7/8	24	0,95	0,08	0,05	40	131
1133829	25	1	27	1,06	0,1	0,07	40	131
1111515	28	1-7/64	30	1,18	0,1	0,07	40	131
1112627	30	1-3/16	32	1,26	0,12	0,08	40	131
1212745	35	1-3/8	37	1,46	0,14	0,09	40	131
1272934	38	1-1/2	40	1,58	0,15	0,10	40	131
1131257	40	1-37/64	42	1,65	0,16	0,11	40	131
1191900	45	1-49/64	48	1,89	0,25	0,17	40	131
1307274	51	2	54	2,13	0,24	0,16	40	131
1246160	55	2-11/64	58,5	2,30	0,34	0,23	60	200

Variants available on request:

1. Different diameters
2. Cable Isol, with insulating cover
3. Cable Protection CR with chloroprene rubber.

SPECIAL DETAILS

WARNINGS AND PRECAUTIONS

Rubber hoses have a service life proportional to their usage.

The equipment and systems where the hose is installed must be designed to ensure safe operation. Given the wide range of possible applications, IVG Colbachini does not guarantee suitability for all specific uses. The selection of the most appropriate product for the intended application, ensuring the required performance and safety standards, is the sole responsibility of the user.

IVG Colbachini shall therefore not be held liable for any use other than those indicated in its catalogues, product data sheets, quotations, order confirmations, or any accompanying recommendations.

Improper product selection and/or use, or failure to comply with installation, operation, maintenance, and storage procedures, may result in hose failure and cause damage to property or personal injury.

IVG Colbachini manufactures and markets both assembled hoses and hoses supplied without fittings.

Assembled Hoses

Before being placed on the market, the hose assembly is subjected by IVG to manufacturing control tests carried out by qualified personnel.

IVG declines all responsibility for any subsequent modifications, disassembly, or reinstallation of fittings performed by the user, as well as for uses that differ from those indicated in the product data sheet or in the absence of maintenance programs and periodic inspections.

Hoses and Fittings as spare parts

The user is responsible for assembling the hose and fittings, ensuring proper hose/fitting compatibility and compliance with the technical specifications for use. It is recommended that the hose assembly be subjected to a pressure tightness test carried out by qualified personnel.

IVG declines all responsibility in this regard.

Precautions

For proper selection and correct use of IVG products, reference should also be made to the recommendations issued by Assogomma, available at www.ivgspa.it, in accordance with ISO 8331 regarding installation, maintenance, methods and duration of use, as well as fitting stability and tightness.

For safety reasons, the working pressure indicated in the product technical data sheet must never be exceeded.

In general, continuous operation at maximum allowable pressure and/or temperature may significantly reduce the hose service life. Regular inspections and hydrostatic testing at the specified test pressure must therefore be carried out. Hydrostatic tests must be performed by adequately trained personnel using suitable equipment and in accordance with recognized testing standards.

For specific applications of rubber hoses, reference should be made to applicable legal requirements or compliance standards. Additional recommendations are available for particularly critical applications. For further information, please contact info@ivgspa.it.