


Flexisil

Cooling systems hose

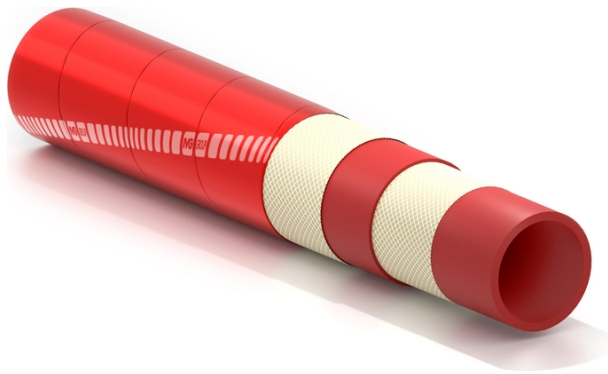


Application:

softwall silicone hose designed for conveying hot air, exhaust gas, or fluids like water mixed with anti-freeze liquids, with good oil resistance. Suitable to be used in cooling systems of cars and industrial vehicle engines, where high temperature resistance is required. (Temperature range for water and anti-freeze liquids: from -40°C/-40°F to +100°C/212°F).

Silicon rubber
 Flame retardant
 Shiny finish

Specifications:

SAE J20 R1. Flame retardant rubber compounds according to ASTM C-542.



Tube:
 red, smooth, silicone.

Reinforcement:
 synthetic cord.

Cover:
 red, shiny, silicone.

Temperature:
 from -50°C (-58°F) to +200°C (+392°F), for few minutes peaks up to +220°C (+428°F).

Branding:
 continuous white stripe "IVG Hot (family logo)...".



Flexisil



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
2500269	8	5/16	16	0,63	3	45	9	135	0,17	0,11	60	200
2500270	15	19/32	23	0,91	3	45	9	135	0,27	0,18	60	200
1700292	19	3/4	27	1,06	3	45	9	135	0,33	0,22	60	200
2500271	22	55/64	30	1,18	3	45	9	135	0,38	0,26	60	200
1491865	25	1	33	1,30	3	45	9	135	0,42	0,28	60	200
1478478	32	1-1/4	40	1,58	3	45	9	135	0,52	0,35	60	200
1483439	51	2	59	2,33	3	45	9	135	0,79	0,53	60	200
2500273	55	2-11/64	63	2,48	3	45	9	135	0,85	0,57	60	200
1600324	63,5	2-1/2	71,5	2,81	3	45	9	135	0,97	0,65	60	200
1600323	76	3	84	3,31	3	45	9	135	1,15	0,77	60	200
1489666	90	3-35/64	98	3,86	3	45	9	135	1,36	0,91	12	40
1600368	102	4	112	4,41	1	15	3	45	1,87	1,25	12	40
1489690	114	4-31/64	124	4,89	1	15	3	45	2,07	1,39	12	40
1496735	127	5	137	5,40	1	15	3	45	2,3	1,55	12	40

Variants available on request:

1. Different diameters.
2. Different colours.

SPECIAL DETAILS

WARNINGS AND PRECAUTIONS

Rubber hoses have a service life proportional to their usage.

The equipment and systems where the hose is installed must be designed to ensure safe operation. Given the wide range of possible applications, IVG Colbachini does not guarantee suitability for all specific uses. The selection of the most appropriate product for the intended application, ensuring the required performance and safety standards, is the sole responsibility of the user.

IVG Colbachini shall therefore not be held liable for any use other than those indicated in its catalogues, product data sheets, quotations, order confirmations, or any accompanying recommendations.

Improper product selection and/or use, or failure to comply with installation, operation, maintenance, and storage procedures, may result in hose failure and cause damage to property or personal injury.

IVG Colbachini manufactures and markets both assembled hoses and hoses supplied without fittings.

Assembled Hoses

Before being placed on the market, the hose assembly is subjected by IVG to manufacturing control tests carried out by qualified personnel.

IVG declines all responsibility for any subsequent modifications, disassembly, or reinstallation of fittings performed by the user, as well as for uses that differ from those indicated in the product data sheet or in the absence of maintenance programs and periodic inspections.

Hoses and Fittings as spare parts

The user is responsible for assembling the hose and fittings, ensuring proper hose/fitting compatibility and compliance with the technical specifications for use. It is recommended that the hose assembly be subjected to a pressure tightness test carried out by qualified personnel.

IVG declines all responsibility in this regard.

Precautions

For proper selection and correct use of IVG products, reference should also be made to the recommendations issued by Assogomma, available at www.ivgspa.it, in accordance with ISO 8331 regarding installation, maintenance, methods and duration of use, as well as fitting stability and tightness.

For safety reasons, the working pressure indicated in the product technical data sheet must never be exceeded.

In general, continuous operation at maximum allowable pressure and/or temperature may significantly reduce the hose service life. Regular inspections and hydrostatic testing at the specified test pressure must therefore be carried out. Hydrostatic tests must be performed by adequately trained personnel using suitable equipment and in accordance with recognized testing standards.

For specific applications of rubber hoses, reference should be made to applicable legal requirements or compliance standards. Additional recommendations are available for particularly critical applications. For further information, please contact info@ivgspa.it.