


# Oslo 10

## Lay flat water discharge hose

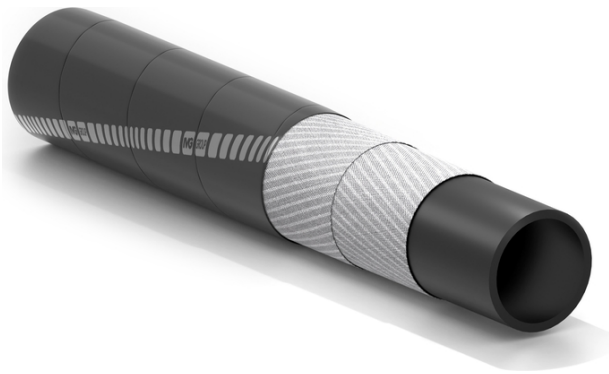

**Application:**

lightweight and lay flat softwall hose, used for the discharge of industrial or waste waters in submerged pumps and in mobile irrigation systems.

Lightweight and lay flat hose

Used in submerged pumps or irrigation systems

Working pressure 10 bar, S.F. 3:1

**Tube:**

black, smooth, synthetic rubber.

**Reinforcement:**

high strength synthetic cord.

**Cover:**

black, smooth (wrapped finish), synthetic rubber, weathering and ozone resistant.

**Temperature:**

from -25°C (-13°F) to +70°C (+158°F).

**Branding:**

continuous green stripe "IVG Water (family logo)..."



# Oslo 10




Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1029053	30	1-3/19	36,5	1,44	10	150	30	450	0,41	0,28	120	400
1029096	40	1-37/64	46	1,81	10	150	30	450	0,48	0,32	120	400
1029134	45	1-49/64	51	2,01	10	150	30	450	0,53	0,36	120	400
1070843	51	2	57	2,25	10	150	30	450	0,6	0,40	120	400
1070932	60	2-3/8	66	2,60	10	150	30	450	0,71	0,48	120	400
1096974	76	3	82	3,23	10	150	30	450	0,89	0,60	120	400
1029304	80	3-5/32	87	3,43	10	150	30	450	1,02	0,69	120	400
1029371	102	4	109	4,29	10	150	30	450	1,29	0,87	120	400
1357468	127	5	135	5,32	10	150	30	450	1,85	1,24	120	400
1386832	152	6	159	6,26	10	150	30	450	1,95	1,31	120	400
1093754	203	8	213	8,39	10	150	30	450	3,66	2,46	60	200
1093746	254	10	265,5	10,46	10	150	30	450	4,98	3,35	60	200

**Variants available on request:**

1. Different diameters
2. Cover in different colours
3. Different working pressures.

**Recommended Couplings:**



## SPECIAL DETAILS

### WARNINGS AND PRECAUTIONS

Rubber hoses have a service life proportional to their usage.

The equipment and systems where the hose is installed must be designed to ensure safe operation. Given the wide range of possible applications, IVG Colbachini does not guarantee suitability for all specific uses. The selection of the most appropriate product for the intended application, ensuring the required performance and safety standards, is the sole responsibility of the user.

IVG Colbachini shall therefore not be held liable for any use other than those indicated in its catalogues, product data sheets, quotations, order confirmations, or any accompanying recommendations.

Improper product selection and/or use, or failure to comply with installation, operation, maintenance, and storage procedures, may result in hose failure and cause damage to property or personal injury.

---

IVG Colbachini manufactures and markets both assembled hoses and hoses supplied without fittings.

#### Assembled Hoses

Before being placed on the market, the hose assembly is subjected by IVG to manufacturing control tests carried out by qualified personnel.

IVG declines all responsibility for any subsequent modifications, disassembly, or reinstallation of fittings performed by the user, as well as for uses that differ from those indicated in the product data sheet or in the absence of maintenance programs and periodic inspections.

#### Hoses and Fittings as spare parts

The user is responsible for assembling the hose and fittings, ensuring proper hose/fitting compatibility and compliance with the technical specifications for use. It is recommended that the hose assembly be subjected to a pressure tightness test carried out by qualified personnel.

IVG declines all responsibility in this regard.

#### Precautions

For proper selection and correct use of IVG products, reference should also be made to the recommendations issued by Assogomma, available at [www.ivgspa.it](http://www.ivgspa.it), in accordance with ISO 8331 regarding installation, maintenance, methods and duration of use, as well as fitting stability and tightness.

**For safety reasons, the working pressure indicated in the product technical data sheet must never be exceeded.**

**In general, continuous operation at maximum allowable pressure and/or temperature may significantly reduce the hose service life. Regular inspections and hydrostatic testing at the specified test pressure must therefore be carried out. Hydrostatic tests must be performed by adequately trained personnel using suitable equipment and in accordance with recognized testing standards.**

For specific applications of rubber hoses, reference should be made to applicable legal requirements or compliance standards. Additional recommendations are available for particularly critical applications. For further information, please contact [info@ivgspa.it](mailto:info@ivgspa.it).