


Easyclean

Extruded hot water washing hose

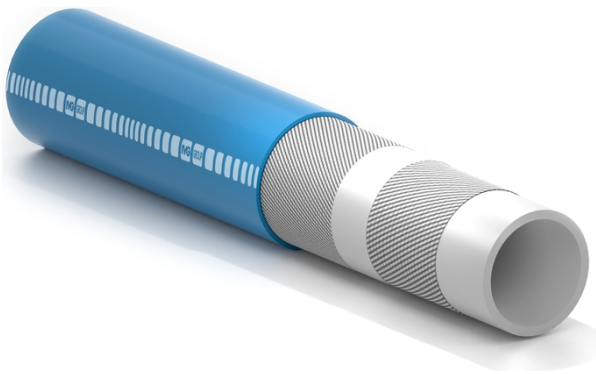

Specifications:

Tube: phthalates free. Cover: according to ISO 22196:2011 (Ref.1). Tube rubber is made with materials according to FDA tit. 21 art. 177.2600 and BfR XXI Cat. 3.

Application:

hot water washing hose in food environment with excellent resistance to high temperatures. Suitable for hygienic operations in dairies, canneries, slaughterhouses and all food processing industries. Particularly fat resistant cover. Not suitable for conveying food.

Extruded hose

Antimicrobial cover, fat resistant
Compliant with food regulations



Tube:

white, seamless synthetic rubber, fat resistant.

Reinforcement:

high, strength synthetic fabrics.

Cover:

antimicrobial, blue, seamless synthetic rubber, aeging, ozone and fat resistant.

Temperature:

from -20°C (-4°F) to +95°C (203°F).

Branding:

IVG EASYCLEAN - WASHDOWN IN FOOD INDUSTRIES - W.P. 10 BAR - SIZE - 95°C - BATCH NUMBER.



Easyclean



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Bending radius		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1466267	13	1/2	21,4	0,84	10	150	30	450	0,34	0,23	80	3,2	60	200
1466275	16	5/8	25	0,99	10	150	30	450	0,43	0,29	95	3,7	60	200
1466283	19	3/4	28,4	1,12	10	150	30	450	0,52	0,35	115	4,5	50	164
1466291	25	1	35	1,38	10	150	30	450	0,7	0,47	155	6,1	40	131

SPECIAL DETAILS

SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, **IVG Colbachini** cannot guarantee the proper functioning of the product for all situations.

The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills. IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it. These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

In general, continuous use at the maximum allowable pressures and/or temperatures significantly reduces the service life of the hose. At regular intervals, an inspection and a hydrostatic test at the test pressure must be carried out to determine whether the hose is still suitable for use. The hydrostatic test must be performed by properly trained personnel using appropriate equipment and in accordance with recognized testing standards.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover, additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).