


# Supertop UPE LL



Suction and delivery of chemicals, solvents and food, PE-UHMW tube

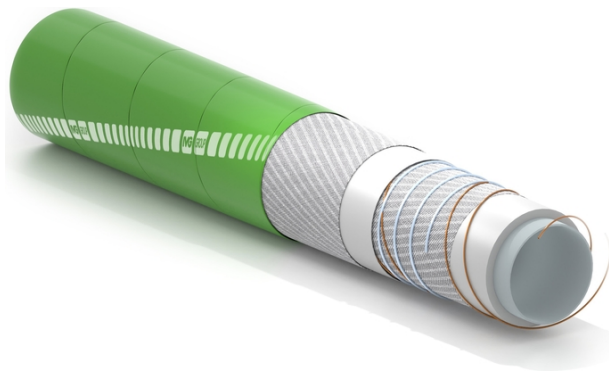


**Specifications:**

BfR III. EN 12115:2021. FDA tit. 21 it. 177.1520 for foods. Tube: Reg. EC 1935/2004. Tube: Reg. EC 2023/2006. Reg. EU 10/2011 aqueous and fatty foods. Phthalates free (REACH Reg.). PAHs free (acc. to ZEK 01.4-08 Cat. 1).

**Application:**

hardwall hose suitable for handling a wide range of aggressive chemicals, solvents, alcohols and food. Normally installed on tank trucks and discharge platforms in chemical, oil and food industries.

Complies with EN 12115  
 UPE tube  
 Suction and delivery hose

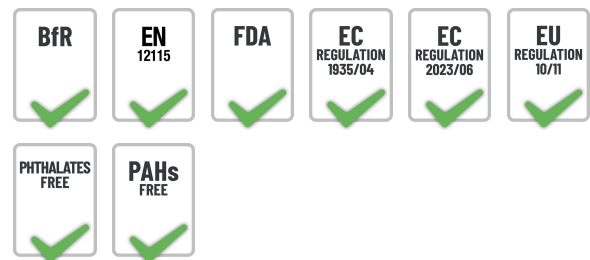

**Tube:**

white, food quality, smooth, high weight polyethylene (PE-UHMW). Chemical resistance according to IVG chemical resistance chart. For temperature exceeding 50°C contact IVG.

**Reinforcement:**

high strength synthetic cord, steel helix wire and antistatic copper wire.

**Cover:**

green, smooth (wrapped finish), EPDM rubber resistant to chemicals, abrasion, weathering and ozone.

**Temperature:**

-40°C (-40°F) +100°C (+212°F) depending on medium.

**Electrical resistance:**

type M.

**Branding:**

continuous blue/white stripe "IVG Chem...". Embossed acc. to EN 12115.



# Supertop UPE LL



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Bending radius		Vacuum		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft	
1399330	19	3/4	31	1,22	16	240	64	960	0,7	0,49	90	3,5	0,9	60	200	
1399292	25	1	37	1,46	16	240	64	960	0,86	0,60	120	4,7	0,9	60	200	
1399322	32	1-1/4	44	1,73	16	240	64	960	1,04	0,73	150	5,9	0,9	60	200	
1399314	38	1-1/2	51	2,01	16	240	64	960	1,34	0,97	180	7,1	0,9	60	200	
1399306	51	2	65	2,56	16	240	64	960	1,76	1,25	250	9,9	0,9	60	200	
1407236	63,5	2-1/2	78	3,07	16	240	64	960	2,33	1,66	320	12,6	0,9	60	200	
1399284	76	3	91	3,59	16	240	64	960	2,86	2,03	400	15,8	0,8	60	200	
1400010	102	4	118	4,65	16	240	64	960	4,44	3,00	550	21,7	0,8	60	200	

### Variants available on request:

1. With black conductive cover ( $\Omega$  type).

### Recommended Couplings:



Camlock



Thread coupling EN 14420-5 (DIN 2817)



Clamp

## SPECIAL DETAILS

### CIP and advice to users on hoses in contact with food

#### Sanitation

- IVG recommends for the first use a wash cycle with potable water at a maximum temperature of 80°C/90°C and a hose sanitation as reported above before conveying food products.
- At the end of each cycle the equipment and hose assemblies must be cleaned and disinfected.
- Strictly follow the times indicated for each cleaning cycle.
- Do not immerse hose assembly in the sanitation fluid because only the inner tube is suitable for contact with the below mentioned solvents.
- Every cleaning cycle must be immediately followed by a complete rinse.
- Do not exceed 3 bar working pressure in CIP systems.

HOSE*	Hot Water	Steam open end	H2O2 1%	H2O2 3%	Peracetic Acid 0.1%	Peracetic Acid 0.5%	Phosphoric Acid 5%	Chlorine 1%	NaOH 2%	NaOH 5%	Nitric Acid 0.1%	Nitric Acid 3%
FOOD CANA FOOD SCOTLAND FOOD TUSCANY FOOD VINO FLEX TRUCK FOOD FLEX/IIIR	90°C 8 hours	Max 130°C 30 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes	Max 50°C 15 minutes	Max 30°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 30°C 15 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes
FOOD DAMASCO FOOD DIJON FOOD MILLENNIUM	80°C 8 hours	Max 110°C 15 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 15 minutes	Max 70°C 15 minutes	Max 70°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes
TRUCK FOOD FLEX	80°C 8 hours	Max 110°C 15 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 15 minutes	Max 70°C 15 minutes	Max 70°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes
FOOD ALICANTE FOOD MILK PLUS LL	90°C 8 hours	Max 130°C 30 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes	Max 50°C 15 minutes	Max 30°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 30°C 15 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes
FOOD OILMILL	80°C 8 hours	Max 110°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 70°C 10 minutes	Max 70°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes
FOOD ACQUABLU	80°C 8 hours	Max 110°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 70°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes
CHEM CLEARCOND FOOD SHETLAND CHEM SUPERTOP UPE CHEM THUNDER FLEX	90°C 12 hours	Max 130°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 70°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes
TRUCK DON/BN TRUCK GORDON	80°C 8 hours	Max 110°C 15 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 15 minutes	Max 70°C 15 minutes	Max 70°C 15 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes

\*The indications regarding hoses on this list refer to the product code found in the IVG catalogue [www.ivgspa.it](http://www.ivgspa.it).

#### General advice

- Hoses are not meant to permanently contain the products they convey.
- Store hoses away from direct sunlight and heat. When not in use store hoses with perforated plugs at both ends.
- Before every use check the hose condition. The hose cover, especially in the fitting area, should show no signs of cuts, tears, or bubbles. There should be no hard or weak areas, signs of detachment or collapse.
- Remember to guarantee traceability of every single piece of hose put into the market (Reg. EC 1935/2004, EC 2023/2006).



## SPECIAL DETAILS

### WARNINGS AND PRECAUTIONS

Rubber hoses have a service life proportional to their usage.

The equipment and systems where the hose is installed must be designed to ensure safe operation. Given the wide range of possible applications, IVG Colbachini does not guarantee suitability for all specific uses. The selection of the most appropriate product for the intended application, ensuring the required performance and safety standards, is the sole responsibility of the user.

IVG Colbachini shall therefore not be held liable for any use other than those indicated in its catalogues, product data sheets, quotations, order confirmations, or any accompanying recommendations.

Improper product selection and/or use, or failure to comply with installation, operation, maintenance, and storage procedures, may result in hose failure and cause damage to property or personal injury.

---

IVG Colbachini manufactures and markets both assembled hoses and hoses supplied without fittings.

#### Assembled Hoses

Before being placed on the market, the hose assembly is subjected by IVG to manufacturing control tests carried out by qualified personnel.

IVG declines all responsibility for any subsequent modifications, disassembly, or reinstallation of fittings performed by the user, as well as for uses that differ from those indicated in the product data sheet or in the absence of maintenance programs and periodic inspections.

#### Hoses and Fittings as spare parts

The user is responsible for assembling the hose and fittings, ensuring proper hose/fitting compatibility and compliance with the technical specifications for use. It is recommended that the hose assembly be subjected to a pressure tightness test carried out by qualified personnel.

IVG declines all responsibility in this regard.

#### Precautions

For proper selection and correct use of IVG products, reference should also be made to the recommendations issued by Assogomma, available at [www.ivgspa.it](http://www.ivgspa.it), in accordance with ISO 8331 regarding installation, maintenance, methods and duration of use, as well as fitting stability and tightness.

**For safety reasons, the working pressure indicated in the product technical data sheet must never be exceeded.**

**In general, continuous operation at maximum allowable pressure and/or temperature may significantly reduce the hose service life. Regular inspections and hydrostatic testing at the specified test pressure must therefore be carried out. Hydrostatic tests must be performed by adequately trained personnel using suitable equipment and in accordance with recognized testing standards.**

For specific applications of rubber hoses, reference should be made to applicable legal requirements or compliance standards. Additional recommendations are available for particularly critical applications. For further information, please contact [info@ivgspa.it](mailto:info@ivgspa.it).