


Coolcable

Cable cooling hose

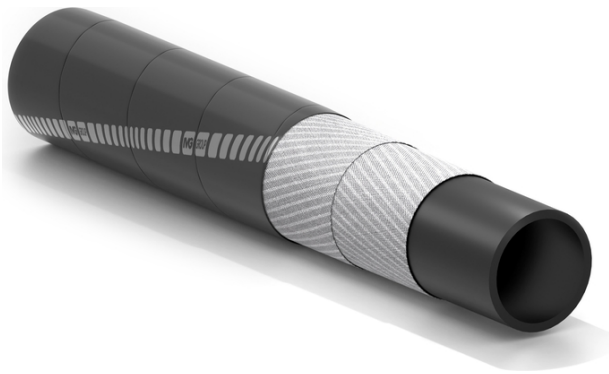

Application:

softwall hose used as sleeves for cooling electrical cables in automatic welding systems.

Insulating rubber

Industrial applications

Length up to 120 m

Tube:

black, smooth, insulating SBR/NR rubber.

Reinforcement:

high strength synthetic cord.

Cover:

black, smooth (wrapped finish), insulating SBR/NR rubber, weathering resistant.

Temperature:

from -30°C (-22°F) to +80°C (+176°F).

Electrical resistance:

$1 \times 10^8 \Omega/m$.



Coolcable



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1191071	12	15/32	22	0,87	10	150	30	450	0,34	0,23	120	400
1204505	14	9/16	21	0,83	10	150	30	450	0,25	0,17	120	400
1047612	15	19/32	22	0,87	10	150	30	450	0,25	0,17	120	400
1191080	18	23/32	28	1,10	10	150	30	450	0,46	0,31	120	400
1175513	20	25/32	30	1,18	10	150	30	450	0,5	0,33	120	400
1130200	25	1	33	1,30	10	150	30	450	0,44	0,30	120	400
1118722	28	1-7/64	35	1,38	10	150	30	450	0,43	0,29	120	400
1176781	30	1-3/16	40	1,58	10	150	30	450	0,7	0,47	120	400
1319795	35	1-3/8	45	1,77	10	150	30	450	0,75	0,50	120	400
1352741	38	1-1/2	47	1,85	10	150	30	450	0,7	0,47	120	400
1319388	42	1-21/32	50	1,97	10	150	30	450	0,68	0,46	120	400
1212567	48	1-57/64	60	2,36	10	150	30	450	1,26	0,85	120	400
1089242	55	2-11/64	65	2,56	10	150	30	450	1,12	0,76	120	400

Variants available on request:

1. In CR or EPDM rubber.
2. Different diameters.
3. Different working pressures.

