


Nairobi

Water discharge hose

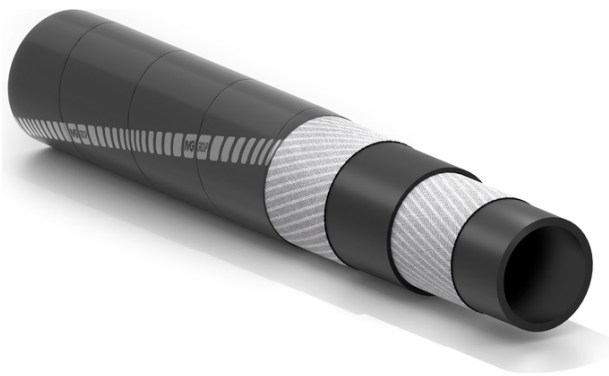

Application:

heavy duty softwall hose with separated layers for the discharge of water and non corrosive fluids. Suitable to be rolled up on hose reels and widely used by industry, in construction sites and agricultural fields.

Suitable to be rolled up on hose reel
Robust hose with separated synthetic cord
Length up to 120 m

Tube:

black, smooth, synthetic rubber.

Reinforcement:

high strength synthetic cord, separated by a layer of rubber.

Cover:

black, smooth (wrapped finish), synthetic rubber, weathering and ozone resistant.

Temperature:

from -30°C (-22°F) to +70°C (+158°F).

Branding:

continuous green stripe "IVG Water (family logo)...".



Nairobi



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1205811	12	15/32	30	1,18	10	150	30	450	0,79	0,53	120	400
1027425	16	5/8	24	0,95	10	150	30	450	0,32	0,22	120	400
1456300	20	25/32	30	1,18	10	150	30	450	0,51	0,34	120	400
1027476	22	7/8	32	1,26	10	150	30	450	0,58	0,39	120	400
1027484	25	1	34	1,34	10	150	30	450	0,55	0,37	120	400
1457306	30	1-3/16	41,5	1,64	10	150	30	450	0,82	0,55	120	400
1027549	35	1-3/8	48	1,89	10	150	30	450	1,13	0,76	120	400
1457144	40	1-37/64	54,5	2,15	10	150	30	450	1,35	0,91	120	400
1027603	45	1-49/64	61	2,40	10	150	30	450	1,74	1,17	120	400
1457136	51	2	69	2,72	10	150	30	450	2,16	1,45	120	400

Variants available on request:

1. Different diameters.
2. Different working pressures.

Recommended Couplings:



Express



Camlock



Claw type G

