


Luwas 30

Multipurpose hose suitable for use in agriculture, car washes, industrial vehicles, compressors

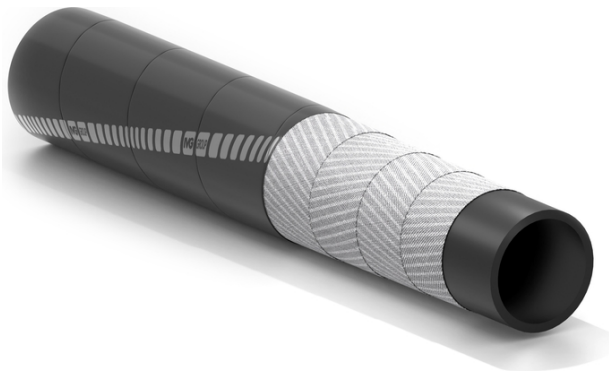

Specifications:

Rubber cover flame retardant according to ASTM C-542.

Application:

softwall hose of excellent quality, versatile, easy to handle and flexible, for delivery of compressed air, hot water, water mixed with additives such as fire fighting powders, insecticides, car washing shampoo, cooling water mixed with antifreeze.

Flame retardant cover compound according to ASTM C-542

Flexible and easy to handle

Resistant to high temperatures up to +100°C



Tube:

black smooth synthetic rubber.

Reinforcement:

high strength synthetic cord.

Cover:


black, smooth (wrapped finish) synthetic rubber, self extinguishing, oils, weathering and ozone resistant.

Temperature:

from -30°C (-22°F) to +100°C (+212°F).

Branding:

yellow brand "IVG water (family logo) Luwas/30...".



Luwas 30



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1307703	10	25/64	18	0,71	30	450	90	1350	0,22	0,15	120	400
1096451	13	1/2	21	0,83	30	450	90	1350	0,26	0,17	120	400
1456784	19	3/4	28	1,10	30	450	90	1350	0,4	0,27	120	400
1456792	25	1	35	1,38	30	450	90	1350	0,59	0,39	120	400
1458540	32	1-1/4	44	1,73	30	450	90	1350	0,91	0,61	120	400
1458558	38	1-1/2	51	2,01	30	450	90	1350	1,17	0,78	120	400
1479652	50	2	66	2,60	30	450	90	1350	1,82	1,22	120	400

Variants available on request:

1. Different diameters.

