


Orinoco HP

Sand blast hose

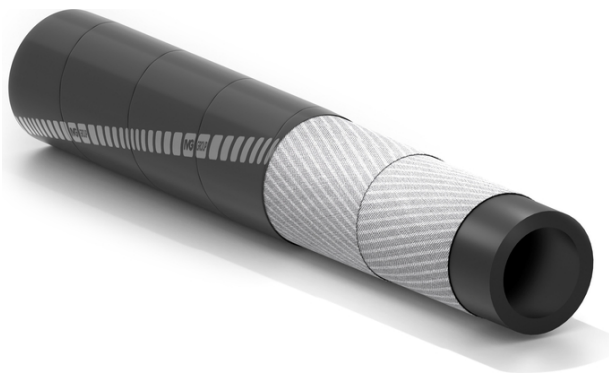

Specifications:

Exceeds the ISO 3861:2008. Abrasion loss of the tube according to ISO 4649: 45 +/- 5mm³.

Application:

particularly abrasion resistant softwall hose, used for the delivery of highly abrasive media such as quartz sand, cast steel shot, corundum, glass. It is manufactured with antistatic rubber compound that prevents the risks of static electricity.

Flexible for easy handling

Excellent abrasion resistance

Abrasion resistance ISO 4649: 45+/- 5 mm³



Tube:

black, smooth, antistatic SBR/NR rubber, with special abrasion resistance that ensures a long service life.

Reinforcement:

high strength synthetic cord.

Cover:

black, smooth, (wrapped finish) antistatic synthetic rubber, abrasion resistant.

Temperature:

from -40°C (-40°F) to +80°C (+176°F).

Branding:

continuous red stripe "IVG Abr (family logo)Orinoco HP...".



Orinoco HP



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1471007	13	1/2	27	1,06	12	180	42	630	0,48	0,33	120	400
1479091	16	5/8	30	1,18	12	180	42	630	0,56	0,38	120	400
1472208	19	3/4	33	1,30	12	180	42	630	0,64	0,43	120	400
1471589	25	1	39	1,54	12	180	42	630	0,78	0,52	120	400
1470191	32	1-1/4	48	1,89	12	180	42	630	1,11	0,75	120	400
1471570	32	1-1/4	50	1,97	12	180	42	630	1,32	0,88	120	400
1472283	38	1-1/2	56,5	2,23	12	180	42	630	1,49	1,01	120	400
1471627	42	1-24/32	60,5	2,38	12	180	42	630	1,61	1,08	120	400
1471341	60	2-3/8	80	3,15	12	180	42	630	2,37	1,59	120	400

Variants available on request:

1. Different diameters.

Recommended Couplings:



Mortar coupling



Sandblasting



Plaster coupling CP to be applied with screws

