


# Pippurn

## Abrasive suction hose

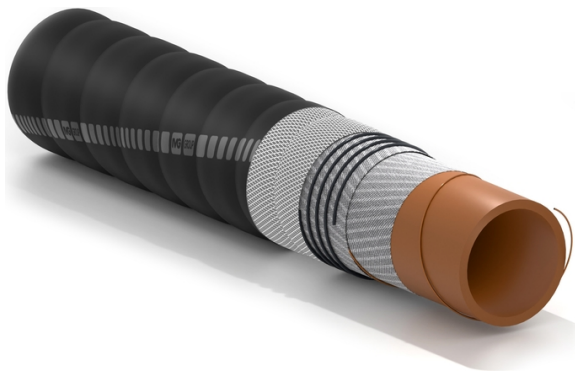

**Application:**

hardwall corrugated hose, specially designed for suction of abrasive materials, sand, gravel and cement. It is used for clean-up systems and for fast abrasive material removal and storage after blast cleaning operations.

Designed for cleaning after blast operations  
Easy to handle  
Extremely flexible

**Tube:**

brown, smooth, natural rubber.

**Reinforcement:**

high strength synthetic cord, steel helix wire and antistatic copper wire.

**Cover:**

black, corrugated (wrapped finish), NR/SBR rubber, abrasion and weathering resistant.

**Temperature:**

from -30°C (-22°F) to +70°C (+158°F).

**Branding:**

continuous red stripe "IVG Truck (Family logo)..."



# Pippurn



Code	Inside diameter		Working pressure		Burst pressure		Weight nominal		Bending radius		Vacuum	Length max	
	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch		bar	m
1211412	51	2	3	45	9	135	1,61	1,09	170	6,7	0,9	60	200
1205471	63,5	2-1/2	3	45	9	135	2,18	1,48	210	8,3	0,9	60	200
1205463	76	3	3	45	9	135	2,55	1,73	270	10,6	0,9	60	200
1202294	102	4	3	45	9	135	3,49	2,36	385	15,2	0,9	60	200
1208217	114	4-31/64	3	45	9	135	4,24	2,86	480	18,9	0,8	60	200
1211242	127	5	3	45	9	135	4,95	3,35	520	20,5	0,8	60	200
1207806	152	6	3	45	9	135	7,06	4,74	670	26,4	0,8	60	200
1227459	203	8	2	30	6	90	9,44	6,37	1000	39,4	0,7	60	200

### Variants available on request:

1. Different diameters
2. Version with black natural rubber tube.
3. Pippurn Cond, for ATEX environment.

### Recommended Couplings:



Camlock



Irriv type CP

