


Navysil

High temperature air and water delivery hose

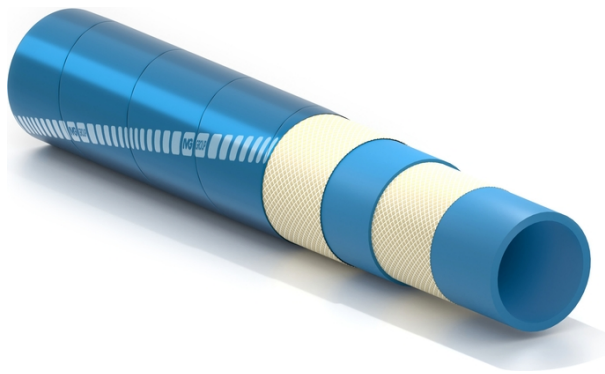

Specifications:
SAE J 2006.

Application:

softwall silicone hose used to convey fluids such as water mixed with anti-freeze liquids and hot air, with good resistance to mineral oils. Suitable to be used as a flexible connection in nautical engine where cooling systems high temperature resistance is required.

Silicon solution
Suitable for high temperatures
Shiny finish



Tube:
blue, smooth, silicone.

Reinforcement:
synthetic cord.

Cover:
blue, smooth (wrapped finish), silicone.

Temperature:
from -50°C to +180°C, peaks up to +200°C.

Branding:
continuous red stripe "Boat (family logo) NAVYSIL - SAE J 2006 - W.P. 3 bar 45 psi S.F. 3:1 (IVG LOGO)".



Navysil



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1476408	19	3/4	27	1,06	3	45	9	135	0,33	0,22	60	200
1478087	25	1	33	1,30	3	45	9	135	0,42	0,28	60	200
1600222	32	1-1/4	40	1,58	3	45	9	135	0,52	0,35	60	200
1700294	38	1-1/2	46	1,81	3	45	9	135	0,61	0,41	60	200
1484141	51	2	59	2,32	3	45	9	135	0,79	0,53	60	200
1600324	63,5	2-1/2	71,5	2,82	3	45	9	135	0,97	0,65	60	200
1600323	76	3	84	3,31	3	45	9	135	1,15	0,77	60	200
1600368	102	4	112	4,41	3	45	9	135	1,87	1,25	60	200

Variants available on request:

1. Different diameters.
2. Different colors.
3. Hardwall hose with smooth cover.

