


# Shetland



## Premium suction and delivery hose for alcohols

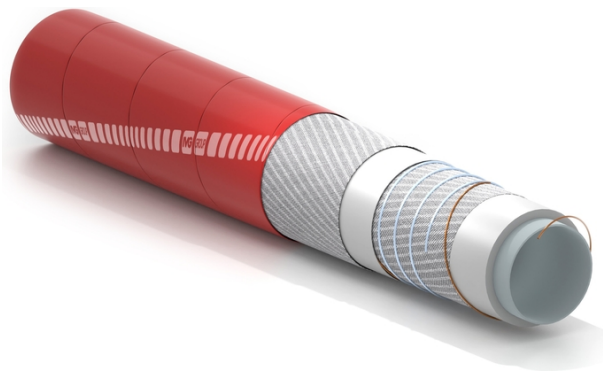

**Application:**

hardwall hose for suction and delivery of alcohols at 95% with no alterations of taste and odour.

For distilleries

Specific for alcohols

Available with corrugated cover

**Specifications:**

Reg. EC 1935/2004. Reg. EC 2023/2006. Reg. EU 10/2011 aqueous, fatty and alcoholic foods up to 95% vol. BfR III. FDA tit. 21 it. 177.1520 for foods. Phthalates free (REACH Reg.).



**Tube:**

white, smooth, food quality plastomer, taste free and odourless.

**Reinforcement:**

high strength synthetic cord, helix wire, and antistatic copper wire.

**Cover:**

red, smooth (wrapped finish), synthetic rubber, weathering resistant.

**Temperature:**

from -30°C (-22°F) to +80°C (+176°F).

**Branding:**

continuous blue/white stripe "IVG Food (family logo)..."



# Shetland



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Bending radius		Vacuum		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft	
1419960	25	1	36,5	1,44	10	150	30	450	0,84	0,56	105	4,1	0,9	60	200	
1419951	38	1-1/2	50,5	1,99	10	150	30	450	1,38	0,94	175	6,9	0,9	60	200	
1417991	51	2	65	2,56	10	150	30	450	1,91	1,28	250	9,9	0,9	60	200	
1431153	63,5	2-1/2	78	3,07	10	150	30	450	2,54	1,71	330	13,0	0,9	60	200	
1419943	70	2-3/4	84,5	3,33	10	150	30	450	2,77	1,86	390	15,4	0,9	60	200	
2600124	76	3	91	3,58	10	150	30	450	3,17	2,13	420	16,5	0,9	60	200	

Variants available on request:

1. Different diameters.
2. Shetland ond, with blue corrugated cover and reduced bending radius.

## SPECIAL DETAILS

### CIP and advice to users on hoses in contact with food

#### Sanitation

- IVG recommends for the first use a wash cycle with potable water at a maximum temperature of 80°C/90°C and a hose sanitation as reported above before conveying food products.
- At the end of each cycle the equipment and hose assemblies must be cleaned and disinfected.
- Strictly follow the times indicated for each cleaning cycle.
- Do not immerse hose assembly in the sanitation fluid because only the inner tube is suitable for contact with the below mentioned solvents.
- Every cleaning cycle must be immediately followed by a complete rinse.
- Do not exceed 3 bar working pressure in CIP systems.

HOSE*	Hot Water	Steam open end	H2O2 1%	H2O2 3%	Peracetic Acid 0.1%	Peracetic Acid 0.5%	Phosphoric Acid 5%	Chlorine 1%	NaOH 2%	NaOH 5%	Nitric Acid 0.1%	Nitric Acid 3%
FOOD CANA TRUCK FOODFLEX/IIR FOOD SCOTLAND FOOD TUSCANY FOOD VINO FLEX	90°C 8 hours	Max 130°C 30 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes	Max 50°C 15 minutes	Max 30°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 30°C 15 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes
FOOD DAMASCO FOOD DIJON FOOD MILLENNIUM	80°C 8 hours	Max 110°C 15 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 15 minutes	Max 70°C 15 minutes	Max 70°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes
TRUCK FOODFLEX	80°C 8 hours	Max 110°C 15 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 15 minutes	Max 70°C 15 minutes	Max 70°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes
FOOD ALICANTE FOOD MILKPLUS LL	90°C 8 hours	Max 130°C 30 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes	Max 50°C 15 minutes	Max 30°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 30°C 15 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes
FOOD OILMILL	80°C 8 hours	Max 110°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 70°C 10 minutes	Max 70°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes
FOOD ACQUABLU	80°C 8 hours	Max 110°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 70°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes
CHEM CLEARCOND FOOD SHETLAND CHEM SUPERTOP UPE CHEM THUNDERFLEX	90°C 12 hours	Max 130°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 70°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes
TRUCK DON/BN TRUCK GORDON	80°C 8 hours	Max 110°C 15 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 15 minutes	Max 70°C 15 minutes	Max 70°C 15 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes

\*The indications regarding hoses on this list refer to the product code found in the IVG catalogue [www.ivgspa.it](http://www.ivgspa.it).

#### General advice

- Hoses are not meant to permanently contain the products they convey.
- Store hoses away from direct sunlight and heat. When not in use store hoses with perforated plugs at both ends.
- Before every use check the hose condition. The hose cover, especially in the fitting area, should show no signs of cuts, tears, or bubbles. There should be no hard or weak areas, signs of detachment or collapse.
- Remember to guarantee traceability of every single piece of hose put into the market (Reg. EC 1935/2004, EC 2023/2006).

