


Max

Hot water discharge hose

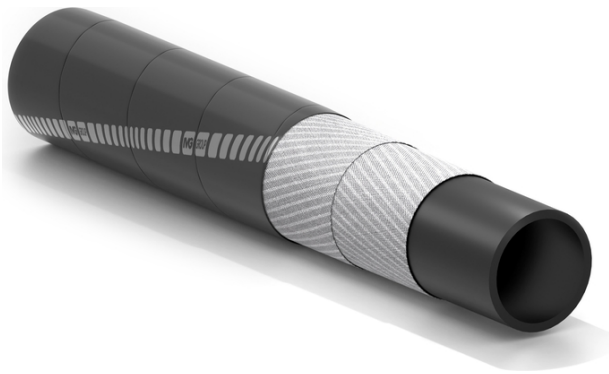

Application:

softwall hot water discharge hose, for water that is even slightly acidic, suitable also for non corrosive fluids in numerous applications in chemical industries. See IVG chemical resistance chart.

Multi-service hose
Long lifespan
Length up to 120 m

Tube:

black, smooth, EPDM rubber.

Reinforcement:

high strength synthetic cord.

Cover:

black, smooth, (wrapped finish) EPDM rubber, heat, weathering, and ozone resistant.

Temperature:

from -40°C (-40°F) to +120°C (+248°F).

Branding:

continuous green stripe "IVG HOT (family logo)...".



Max



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1192477	10	25/64	20	0,79	10	150	30	450	0,29	0,20	120	400
1177818	12	15/32	22	0,87	10	150	30	450	0,33	0,22	120	400
1282093	13	1/2	20	0,79	10	150	30	450	0,21	0,14	120	400
1177494	15	19/32	25	0,99	10	150	30	450	0,39	0,26	120	400
1193201	16	5/8	26	1,02	10	150	30	450	0,41	0,28	120	400
1186787	18	23/32	28	1,10	10	150	30	450	0,44	0,30	120	400
1048147	19	3/4	27	1,06	10	150	30	450	0,32	0,22	120	400
1177826	20	35/32	30	1,18	10	150	30	450	0,48	0,32	120	400
1177834	25	1	35	1,38	10	150	30	450	0,58	0,39	120	400
1177540	30	1-3/16	41,5	1,64	10	150	30	450	0,77	0,52	120	400
1241320	32	1-1/4	43,5	1,71	10	150	30	450	0,82	0,55	120	400
1196804	38	1-1/2	50	1,97	10	150	30	450	1,00	0,67	120	400
1177460	45	1-49/64	61	2,40	10	150	30	450	1,58	1,06	120	400
1234315	51	2	65,5	2,58	10	150	30	450	1,58	1,06	120	400
1227670	63,5	2-1/2	78,5	3,09	10	150	30	450	1,9	1,28	120	400

Variants available on request:

1. Different diameters.
2. Hose cover in different colours.
3. Different working pressures.

Recommended Couplings:



Camlock EN 14420-7 (DIN 2828)

SPECIAL DETAILS

WARNINGS AND PRECAUTIONS

Rubber hoses have a service life proportional to their usage.

The equipment and systems where the hose is installed must be designed to ensure safe operation. Given the wide range of possible applications, IVG Colbachini does not guarantee suitability for all specific uses. The selection of the most appropriate product for the intended application, ensuring the required performance and safety standards, is the sole responsibility of the user.

IVG Colbachini shall therefore not be held liable for any use other than those indicated in its catalogues, product data sheets, quotations, order confirmations, or any accompanying recommendations.

Improper product selection and/or use, or failure to comply with installation, operation, maintenance, and storage procedures, may result in hose failure and cause damage to property or personal injury.

IVG Colbachini manufactures and markets both assembled hoses and hoses supplied without fittings.

Assembled Hoses

Before being placed on the market, the hose assembly is subjected by IVG to manufacturing control tests carried out by qualified personnel.

IVG declines all responsibility for any subsequent modifications, disassembly, or reinstallation of fittings performed by the user, as well as for uses that differ from those indicated in the product data sheet or in the absence of maintenance programs and periodic inspections.

Hoses and Fittings as spare parts

The user is responsible for assembling the hose and fittings, ensuring proper hose/fitting compatibility and compliance with the technical specifications for use. It is recommended that the hose assembly be subjected to a pressure tightness test carried out by qualified personnel.

IVG declines all responsibility in this regard.

Precautions

For proper selection and correct use of IVG products, reference should also be made to the recommendations issued by Assogomma, available at www.ivgspa.it, in accordance with ISO 8331 regarding installation, maintenance, methods and duration of use, as well as fitting stability and tightness.

For safety reasons, the working pressure indicated in the product technical data sheet must never be exceeded.

In general, continuous operation at maximum allowable pressure and/or temperature may significantly reduce the hose service life. Regular inspections and hydrostatic testing at the specified test pressure must therefore be carried out. Hydrostatic tests must be performed by adequately trained personnel using suitable equipment and in accordance with recognized testing standards.

For specific applications of rubber hoses, reference should be made to applicable legal requirements or compliance standards. Additional recommendations are available for particularly critical applications. For further information, please contact info@ivgspa.it.