


Oilmill Easy



Suction and discharge hose for olive oil. EASYSHELL SYSTEM

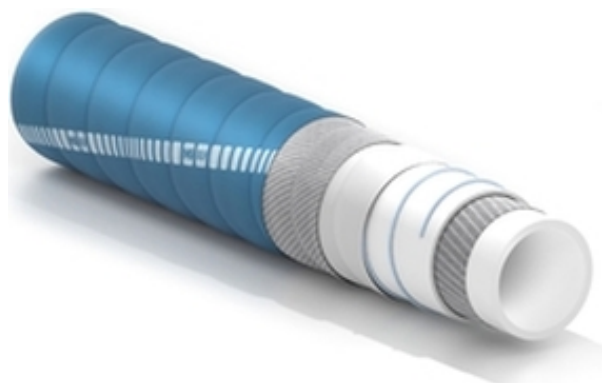

Application:

hardwall corrugated hose, lightweight and flexible, for suction and delivery of olive oil and fatty foods.

The only one for edible oils
 EasyShell system
 Safety for olive oil

Specifications:

Bisphenol A free. D.M. 21/03/73 fatty foods. FDA tit.21 art.177.2600 for fatty foods. Phthalates free (REACH Reg.). Reg. EC 1935/2004. Reg. EC 2023/2006.



Tube:

white, smooth, food quality synthetic rubber.
 Contains no phthalates.

Reinforcement:

high strength synthetic cord and steel helix wire.

Cover:


blue, corrugated (wrapped finish) synthetic rubber, fat and weathering resistant.

Temperature:


from -25°C (-13°F) to +100°C (+212°F).

Branding:

yellow/green continuous stripe "IVG Food (family logo)..."



Oilmill Easy

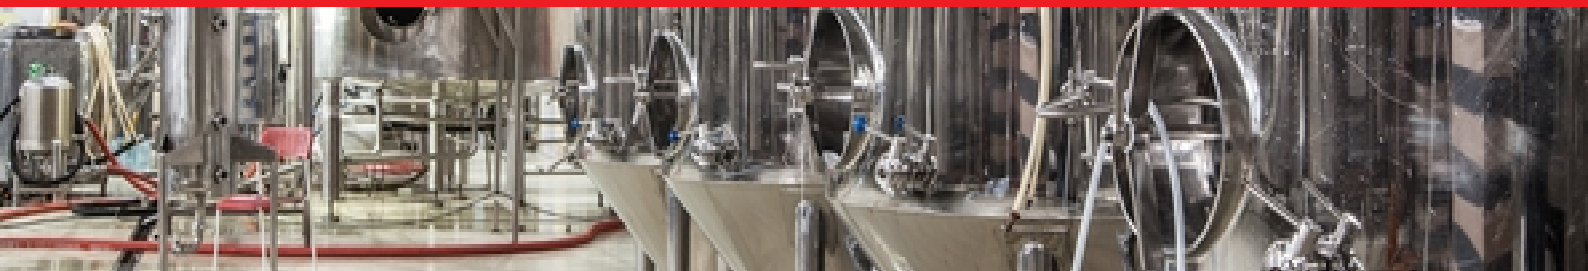

Code	Inside diameter		Working pressure		Burst pressure		Weight nominal		Bending radius		Vacuum	Length max	
	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
1462288	25	1	10	150	30	450	0,69	0,46	75	3,0	0,9	60	200
1464396	32	1-1/4	10	150	30	450	0,89	0,60	95	3,7	0,9	60	200
1462296	38	1-1/2	10	150	30	450	1,17	0,78	115	4,5	0,9	60	200
1457233	40	1-37/64	10	150	30	450	1,22	0,82	120	4,7	0,9	60	200
1457250	50	1-31/32	10	150	30	450	1,49	1,00	150	5,9	0,9	60	200
1457241	60	2-3/8	10	150	30	450	1,75	1,17	180	7,1	0,9	60	200
1467409	63,5	2-1/2	10	150	30	450	1,84	1,24	195	7,7	0,9	60	200
1462300	76	3	10	150	30	450	2,28	1,53	225	8,9	0,9	60	200
1456717	80	3-5/32	10	150	30	450	2,38	1,60	240	9,5	0,9	60	200
1453688	100	34-15/16	10	150	30	450	2,98	2,00	360	14,2	0,9	60	200

Recommended Couplings:



EasyShell clamps



Food coupling SMS 1145



Food coupling DIN 11851

SPECIAL DETAILS

SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, **IVG Colbachini** cannot guarantee the proper functioning of the product for all situations.

The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills. IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it. These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover, additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).