


# Cavi 24

NEW

## Cable protection hose

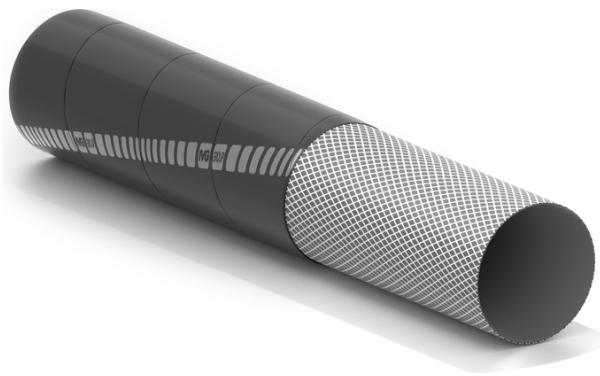

### Application:

lightweight softwall hose designed for the protection of electrical cables installed in wagons and locomotives. Made with a flame retardant compound with low emission of matt fumes and low toxicity of combustion products.

Lightweight hose for the protection of electrical cables

According to EN 45545-2 HL3 R22 and R23  
Flame retardant compound

### Specifications:

Technical Specification Trenitalia n° 304188 Esp.  
03. EN 45545-2 HL3 R22 and R23.



### Tube:

black, smooth synthetic rubber.

### Reinforcement:

special synthetic cord.

### Cover:

black, smooth (wrapped finish), synthetic rubber.

### Temperature:

from -30°C (-22°F) to +80°C (+176°F).

### Branding:

continuous white spiral stripe "IVG/quarter and year of manufacture/ FS dis. 304188/ cat. FS HL3".



# Cavi 24

NEW



Code	Inside diameter		Outside diameter		Weight nominal		Length max	
	mm	inch	mm	inch	kg/m	lbs/ft	m	ft
1503871	9	23/64	15	0,59	0,13	0,09	40	131
1503367	13	1/2	19	0,75	0,17	0,11	40	131
1504711	13	1/2	21	0,83	0,26	0,17	40	131
1503375	15	19/32	21	0,83	0,19	0,13	40	131
1503359	16	5/8	24	0,94	0,3	0,20	40	131
1504401	20	25/32	26,5	1,04	0,29	0,19	40	131
1503081	24	1	30	1,18	0,29	0,19	40	131
1504410	33	1-19/64	39	1,54	0,39	0,26	40	131
1503880	38	1-1/2	44	1,73	0,44	0,30	40	131
1503340	41	1-39/64	47	1,85	0,48	0,32	40	131
1503383	45	1-49/64	54	2,13	0,94	0,63	40	131

Variants available on request:

1. Different diameters.

