


Sahara BN 240°C

Hot air blower hose from compressor to tank

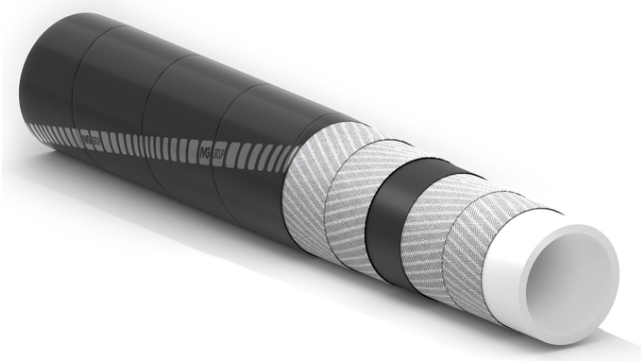

Application:

softwall hose designed for conveying hot, dry air from compressor to tank truck.

Suitable for all types of road tanker compressors
Easy to handle
It resists the aggression of hot air

Tube:

white, smooth, EPR rubber, heat resistant.

Reinforcement:

high strength synthetic cord.

Cover:

black, smooth (wrapped finish), EPDM rubber, weathering and ozone resistant.

Temperature:

from -40°C to +200°C, peaks up to 240°C. High temperatures can reduce the service life.

Branding:

continuous white stripe "IVG Truck (family logo)..."



Sahara BN 240°C



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1420186	51	2	69	2,72	10	150	30	450	1,77	1,19	120	400
1425005	63,5	2-1/2	82	3,23	10	150	30	450	2,26	1,52	120	400
1429655	76	3	94	3,70	10	150	30	450	2,51	1,69	120	400

Variants available on request:

1. Different diameters
2. Sahara 240°C (or 180°C) with black tube and cover
3. Sahara BD 240°C (or 180°C) with white rubber tube and blue cover
4. Sahara BN 180°C

Recommended Couplings:



Storz



Clamps, bands and other clamping systems



Camlock

