


# Durana

## Water discharge hose

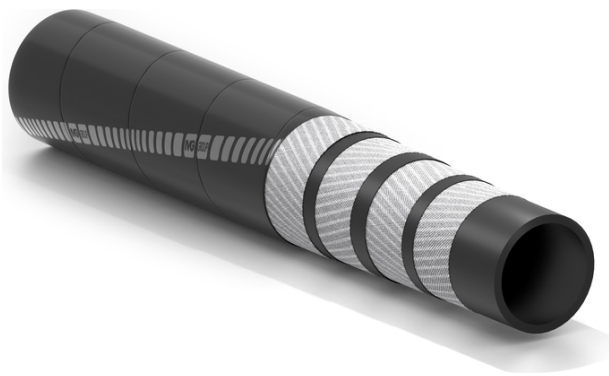

**Application:**

softwall hose with separated layers for the discharge of water and non corrosive fluids. Suitable to be rolled up on hose reels. Widely used in dust eliminating systems during tunnelling operations, in carbon deposits and in building sites.

Suitable to be rolled up on hose reel  
High strength synthetic cord, S.F. 4:1  
Weathering and ozone resistant

**Tube:**

black, smooth, synthetic rubber.

**Reinforcement:**

high strength synthetic cord, separated by a layer of rubber.

**Cover:**

black, smooth (wrapped finish), synthetic rubber, weathering and ozone resistant.

**Temperature:**

from -30°C (-22°F) to +70°C (+158°F).

**Branding:**

continuous green stripe "IVG Water (family logo)...".



# Durana



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1387405	25	1	41	1,61	10	150	40	600	1,00	0,67	120	400
1387413	32	1-1/4	50	1,97	10	150	40	600	1,31	0,88	120	400
1301349	38	1-1/2	55,5	2,19	10	150	40	600	1,48	1,00	120	400
1259628	51	2	69	2,72	10	150	40	600	1,91	1,28	120	400
1398458	63,5	2-1/2	82,5	3,25	10	150	40	600	2,51	1,69	120	400

**Variants available on request:**

1. Different diameters
2. Different working pressures.

**Recommended Couplings:**



Irriv type BR



Irriv type CP



Irriv type AR

