


# FRAS Air Water

Compressed air hose and water hose for mines

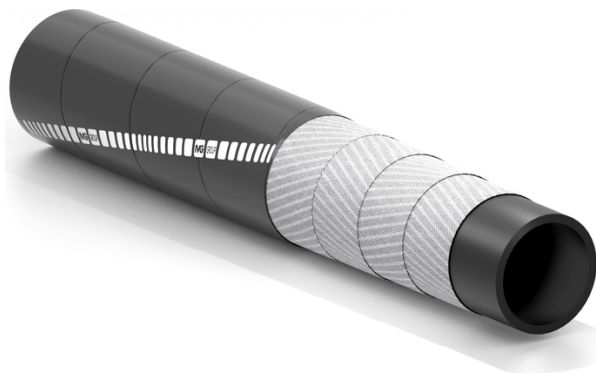

**Specifications:**  
AS 2660 class B.

**Application:**  
fire resistant and conductive softwall hose for compressed air and water, used in mines.

Fire resistant and conductive  
Length up to 120 m  
Flexible for easy handling



**Tube:**  
black, smooth, conductive NBR rubber, oil resistant.

**Reinforcement:**  
high strength synthetic cord.

**Cover:**  
black, smooth, (wrapped finish) in conductive CR rubber, fire, oil, and weathering resistant.

**Temperature:**  
from -15°C (+5°F) to +70°C (+158°F).

**Branding:**  
continuous orange stripe "IVG / AS 2660 B W.P. 17,5 Bar AIR/WATER FRAS".



## FRAS Air Water



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1335626	13	1/2	22	0,87	17,5	263	70	1050	0,29	0,20	120	400
1335618	25	1	36	1,42	17,5	263	70	1050	0,65	0,43	120	400
1356852	38	1-1/2	51	2,01	17,5	263	70	1050	1,03	0,69	120	400
1335600	51	2	65,5	2,58	17,5	263	70	1050	1,51	0,99	120	400

