


Amalfi LL



Рукав для отвода выхлопных газов, смешанных с морской водой

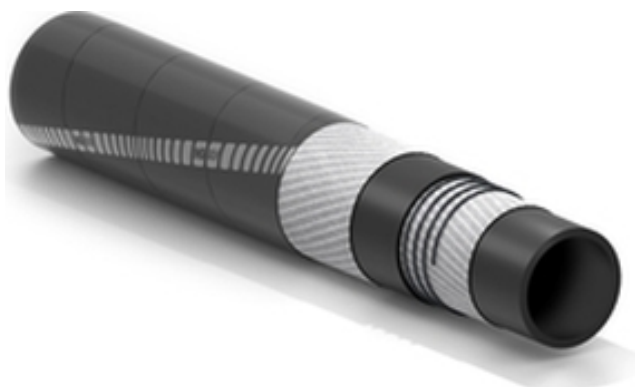

Применение:

гибкий, лёгкий напорно-всасывающий рукав для отвода выхлопных газов, смешанных с морской водой, предназначен для прогулочных катеров длиной до 24 метров.

разные диаметры
одобрен RINA и Lloyd's
Отличный радиус изгиба

Нормативно-правовые акты:

ISO 13363:2016 кат. 2B Одобрено RINA с Lloyd's. SAE J 2006:2013 кат. R2 Одобрено RINA с Lloyd's.



Внутренний слой:

чёрный, гладкий из синтетического каучука, устойчивый к выхлопным газам.

Усиление:

высокопрочный синтетический корд, встроенная стальная спираль.

Покрытие:

чёрное, гладкое (с отпечатком текстильного бандаж), из синтетического каучука, устойчивое к атмосферным воздействиям и истиранию.

Температура:

от -30°C до +100° C.

Маркировка:

красная маркировочная лента IVG BOAT AMALFI LL MARINE WET EXHAUST B.P. 2,5 bar 37,5 psi -30°C+100°C -22°F+212°F RINA DIP437423CS/002 ISO 13363:16 2B LLOYD'S LR2536277TA SAE J 2006:13 R2 I.D. M/Y.

Amalfi LL



Код	Внутренний диаметр		Внешний диаметр		Разрывное давление		Номинальный вес		Радиус изгиба		Максимальная длина	
	mm	inch	mm	inch	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1440764	20	25/32	29	1,14	2,5	38	0,51	0,34	80	3,2	120	400
1439030	25	1	34	1,34	2,5	38	0,63	0,42	100	3,9	120	400
1439049	30	1-3/16	39	1,54	2,5	38	0,73	0,49	120	4,7	120	400
1442368	32	1-1/4	41	1,62	2,5	38	0,77	0,52	130	5,1	120	400
1439057	35	1-3/8	44	1,73	2,5	38	0,83	0,56	140	5,5	120	400
1449478	38	1-1/2	47	1,85	2,5	38	0,89	0,60	150	5,9	120	400
1439065	40	1-37/64	50	1,97	2,5	38	1,01	0,68	160	6,3	120	400
1439073	45	1-49/64	55	2,17	2,5	38	1,15	0,77	170	6,7	120	400
1439081	51	2	61	2,40	2,5	38	1,29	0,87	180	7,1	120	400
1458647	55	2-11/64	65	2,56	2,5	38	1,38	0,93	190	7,5	120	400
1439090	60	2-3/8	70	2,76	2,5	38	1,49	1,00	190	7,5	120	400
1439316	65	2-9/16	75	2,96	2,5	38	1,61	1,08	210	8,3	120	400
1440500	75	2-61/64	85	3,35	2,5	38	1,84	1,24	250	9,9	120	400

Возможные варианты по запросу:

1. Другие диаметры.

SPECIAL DETAILS

SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, **IVG Colbachini** cannot guarantee the proper functioning of the product for all situations.

The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills. IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it. These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover, additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).