


Alaska

Steel wire compressed air hose

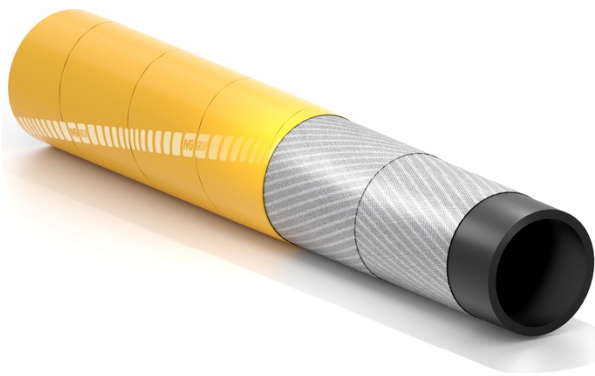

Application:

high pressure steel wire reinforced compressed air hose; designed for applications where a heavy duty hose is necessary.

Robust construction
Anti-kinking structure
High working pressure

Tube:
black, smooth, SBR rubber.

Reinforcement:
inserts of steel wire.

Cover:
yellow, smooth, (wrapped finish) long lasting EPDM rubber, weathering and ozone resistant.

Temperature:
from -30°C (-22°F) to +70°C (+158°F).

Branding:
continuous blue stripe "IVG Air (Family Logo)...".



Alaska



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1282565	13	1/2	25,5	1,00	70	1050	210	3150	0,57	0,38	120	400
1282557	19	3/4	31,5	1,24	50	750	150	2250	0,75	0,50	120	400
1225740	25	1	37,5	1,48	45	675	135	2025	0,92	0,62	120	400
1290690	32	1-1/4	44,5	1,75	45	675	135	2025	1,22	0,82	120	400
1264176	38	1-1/2	51	2,01	45	675	135	2025	1,47	0,99	120	400
1359568	51	2	65	2,56	40	600	120	1800	1,98	1,33	120	400
1289012	63,5	2-1/2	80	3,15	35	525	105	1575	2,85	1,92	120	400
1359550	76	3	95	3,74	35	525	105	1575	4,37	2,94	120	400
1359541	102	4	121	4,77	30	450	90	1350	5,7	3,83	60	200

Variants available on request:

- 1.Hose cover according to MSHA specification
- 2.Different diameters
- 3.Black cover
- 4.Different working pressures
- 5.Tube resistant to oil mist traces
- 6.Version resistant to temperatures up to 100°C.

Recommended Couplings:



Rapid



Giroexp/S



Clamps, bands and other clamping systems

SPECIAL DETAILS

WARNINGS AND PRECAUTIONS

Rubber hoses have a service life proportional to their usage.

The equipment and systems where the hose is installed must be designed to ensure safe operation. Given the wide range of possible applications, IVG Colbachini does not guarantee suitability for all specific uses. The selection of the most appropriate product for the intended application, ensuring the required performance and safety standards, is the sole responsibility of the user.

IVG Colbachini shall therefore not be held liable for any use other than those indicated in its catalogues, product data sheets, quotations, order confirmations, or any accompanying recommendations.

Improper product selection and/or use, or failure to comply with installation, operation, maintenance, and storage procedures, may result in hose failure and cause damage to property or personal injury.

IVG Colbachini manufactures and markets both assembled hoses and hoses supplied without fittings.

Assembled Hoses

Before being placed on the market, the hose assembly is subjected by IVG to manufacturing control tests carried out by qualified personnel.

IVG declines all responsibility for any subsequent modifications, disassembly, or reinstallation of fittings performed by the user, as well as for uses that differ from those indicated in the product data sheet or in the absence of maintenance programs and periodic inspections.

Hoses and Fittings as spare parts

The user is responsible for assembling the hose and fittings, ensuring proper hose/fitting compatibility and compliance with the technical specifications for use. It is recommended that the hose assembly be subjected to a pressure tightness test carried out by qualified personnel.

IVG declines all responsibility in this regard.

Precautions

For proper selection and correct use of IVG products, reference should also be made to the recommendations issued by Assogomma, available at www.ivgspa.it, in accordance with ISO 8331 regarding installation, maintenance, methods and duration of use, as well as fitting stability and tightness.

For safety reasons, the working pressure indicated in the product technical data sheet must never be exceeded.

In general, continuous operation at maximum allowable pressure and/or temperature may significantly reduce the hose service life. Regular inspections and hydrostatic testing at the specified test pressure must therefore be carried out. Hydrostatic tests must be performed by adequately trained personnel using suitable equipment and in accordance with recognized testing standards.

For specific applications of rubber hoses, reference should be made to applicable legal requirements or compliance standards. Additional recommendations are available for particularly critical applications. For further information, please contact info@ivgspa.it.